


62" x 37" Trench Drain ADA

Center Front Trench Drain

OD: 62 1/2" x 36 3/4" (1588 mm x 933 mm)
 Threshold Hight: 1 3/16" (30 mm)
 Rough Opening: 62 3/4" x 36 7/8" (1594 mm x 937 mm)
 Shower Pan Weight: 130 lbs. (59kg.)

The Gemstone 6237ETR trench drain roll-in pan is suitable for ADA transfer pan configuration. The drain feature at the front of the pan maximizes water retention, while complying with ADA elevation change requirements for a roll-in pan. In addition, with correct slope back to the pan from the bathroom floor, water can re-enter the pan reducing the opportunity for fugitive water acting as a floor drain for the rest of the bathroom. The option to add an optional factory applied patented membrane system to the shower pan is perfect for eliminating the risk of leakage at the most vulnerable point between the threshold of the shower pan and the flooring that adjoins, allowing the pan to be tied into a tile or flooring system. Gemstone shower pans meet and exceed the F462 COF testing while being very easy to clean and the 1" water dams allow any wall system to be securely added. The grid system on the bottom of the pan is built in for maximum structure and integrity. The 6237ETR is perfect for commercial applications for maximum durability.


Gemstone shower pans carry a 10 year factory warranty when installed in accordance to the Gemstone installation instructions

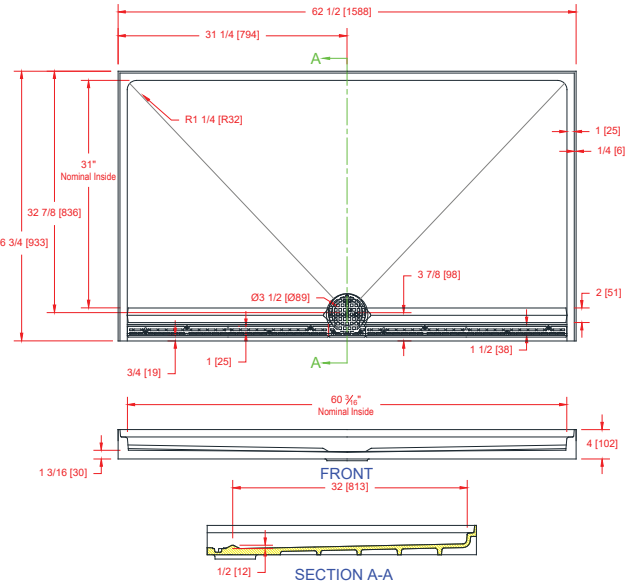

Drain Layout

Center of Drain is 33 (838mm) from back wall by 31 5/16" (795mm) from left or right stud wall.
 A 6" core is recommended for drain clearance*

*Check all building and fire codes prior to installation

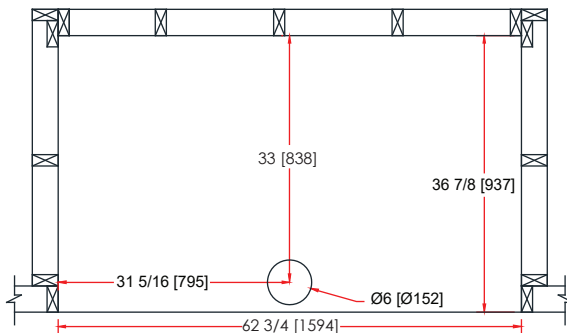

Certified by:
Home Innovation Lab
 (NAHB):ANSI Z124.2



Gemstone Shower Pans are
 proudly made in the USA